


USB Drive *plus S*

Internal or external drive for USB 2.0 interface with four different slots with up to 30 MBytes/s transfer rates

- ◆ Very fast internal drive with standard 3.5" case and high speed USB 2.0 interface with slots for most popular Flash memory cards; also available as an external version in a robust plastic case in grey; other colours on request
- ◆ Four slots for memory cards:
 - 1.) ATA PC Card or HDD in PC Card format (Type I or II)
 - 2.) CompactFlash Card (Type I or II) or Microdrive
 - 3.) SD & SDHC Card (supports SD/SDHC High-Speed Mode), MMC & MMC plus
 - 4.) Memory Stick PRO/PRO Duo/PRO-HG/PRO-HG Duo
- ◆ Each slot appears under Windows as a separate removable media drive; data can be copied fast and directly between cards inserted in different slots
- ◆ By using appropriate PC Card, CF or MS PRO adapters compatible with memory cards such as miniSD/SDHC, microSD/SDHC, Memory Stick Micro M2 or xD-Cards
- ◆ USB 2.0 Mass Storage compliant; downwards compatible to USB 1.1
- ◆ Windows ME, 2000 with Service Pack 3, XP, Vista and Linux compatible using drivers contained in operating system
- ◆ Power supply via USB standard connector at internal version, external version USB bus powered; external power supply available on request
- ◆ Optional extensions such as activation of software write protection and unmounting of cards from application software

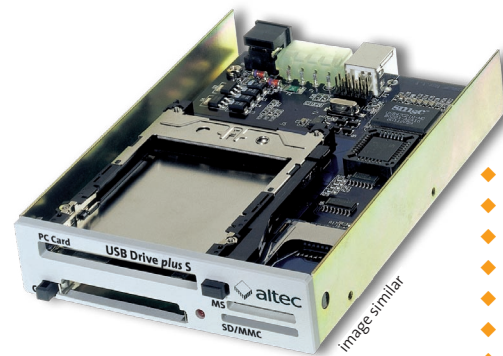

Storage media which are directly supported by the USB Drive *plus S*

24 Months Warranty

More details

USB Drive <i>plus S</i>	Item no.
USB Drive <i>plus S</i> internal	B25AL153
USB Drive <i>plus S</i> external grey	B25AL153E

Technical Specifications

RoHS COMPLIANT
2002/95/EC


Hardware		Temperature	0° to +70°C (operating) -40° to +75°C (non-operating)
- Interface	USB 2.0 high speed	Electrical	
- Memory card slots	1x PC Card (Type I, II); 1x Compact-Flash (Typ I + II); 1x SD/SDHC/MMC/MMCplus; 1x Memory Stick PRO/PRO Duo/PRO-HG/PRO-HG Duo	- Power consumption	depends on memory card type
- Dimensions	LxWxH: 142x101.6x25.4 mm; standard 3.5" drive dimensions; external version LxWxH: 147x108x32 mm	System Performance	
Environmental Specifications		- Data Transfer Rate	up to 30 MBytes/s; depends on memory card type and USB connection (USB 1.1 or 2.0)
- Humidity	0% to 90%, non-condensing	Software	
		- Supported OS	No driver required for Windows ME, 2000 SP3, XP, Vista and Linux

altec ComputerSysteme GmbH
Bayernstr. 10 · 30855 Langenhagen · Germany
Phone +49-511-9-83-81-0 · Fax +49-511-9-83-81-49
eMail: info@altec-cs.com
Web: www.altec-cs.com


ISO 9001:2008 certified

altec
Easy Perfection


More details about the USB Drive plus S

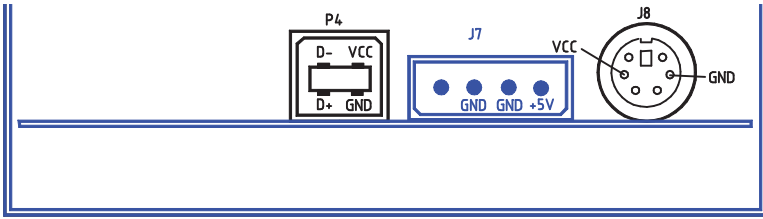


Connector pin assignment internal
Rear view

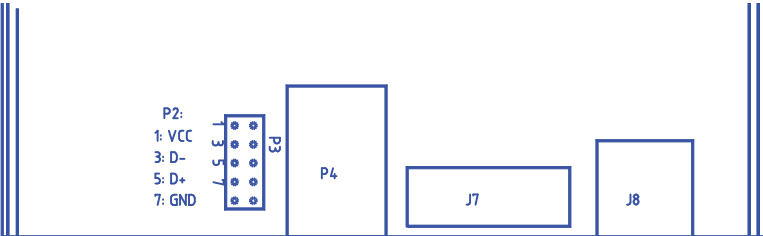

Connector pin assignment internal
Top view

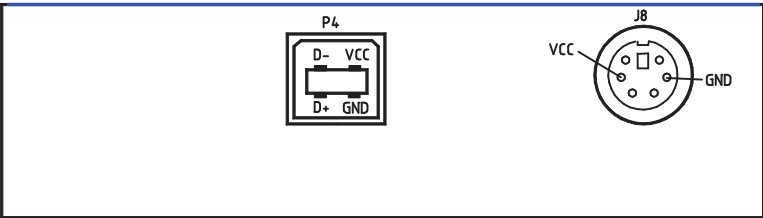

Connectors external
Rear view

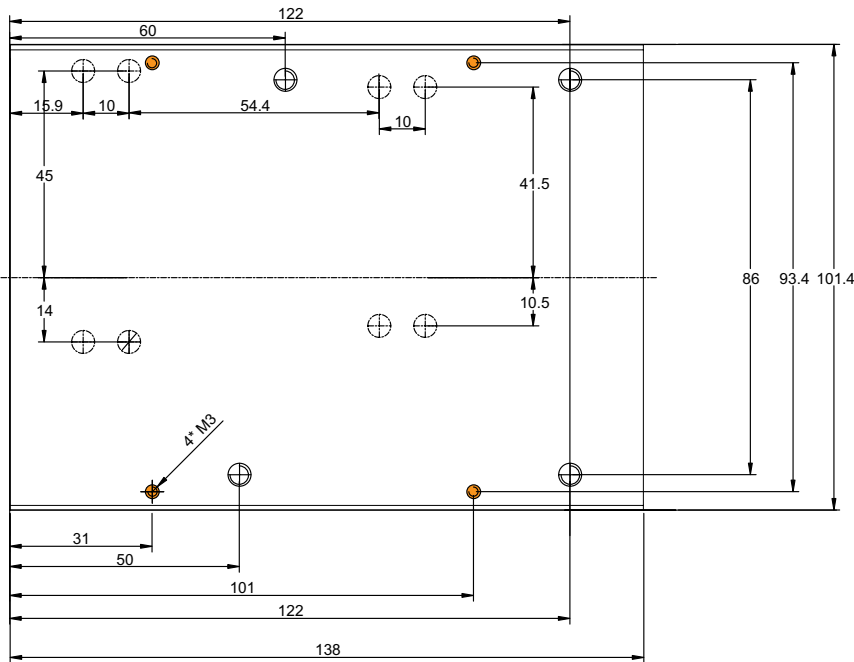


Mechanical Dimensions

Bottom View

A total of four bottom and four side mounting holes (marked in orange) are available for installation.

The mounting holes require M3 screws with a maximum depth of 5 mm.

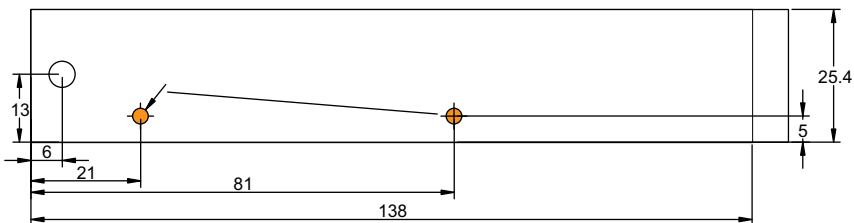

Mechanical Dimensions

Side View